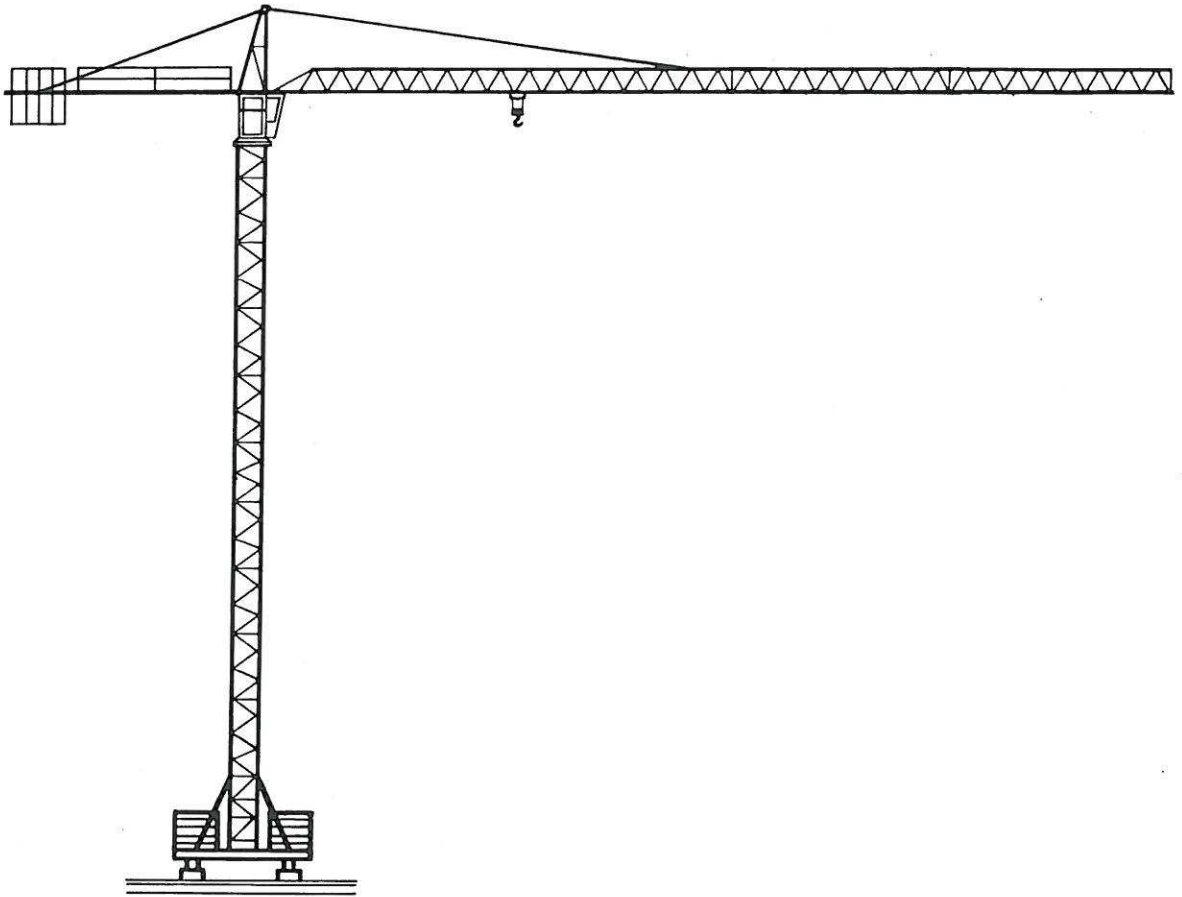
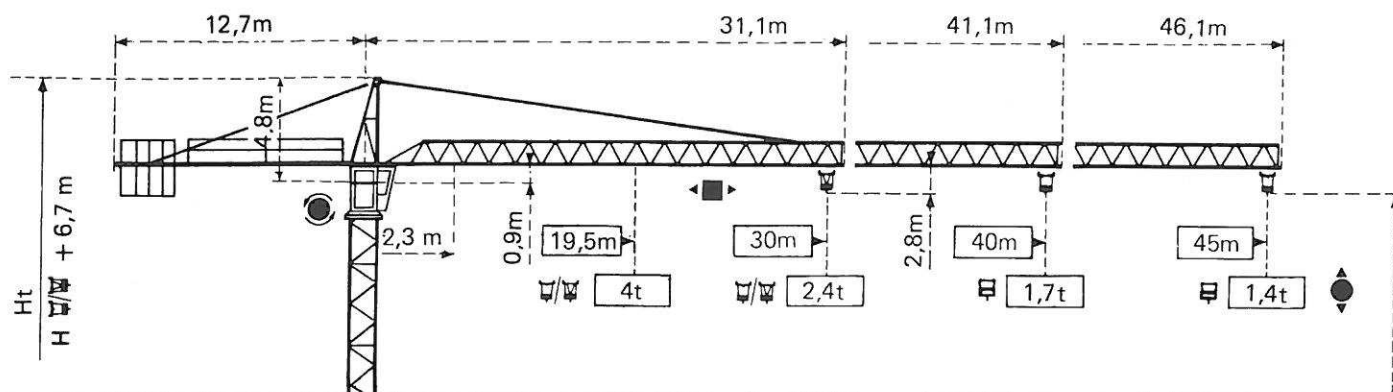




TOPKIT E10/14C

POTAIN 

Cotes *Abmessungen* **Dimensions** *Dimensiones*



Mature Mast Mast Mastil
☒ 1,2m x 1,2m

Mature Mast Mast Mastil
☒ 1,6m x 1,6m

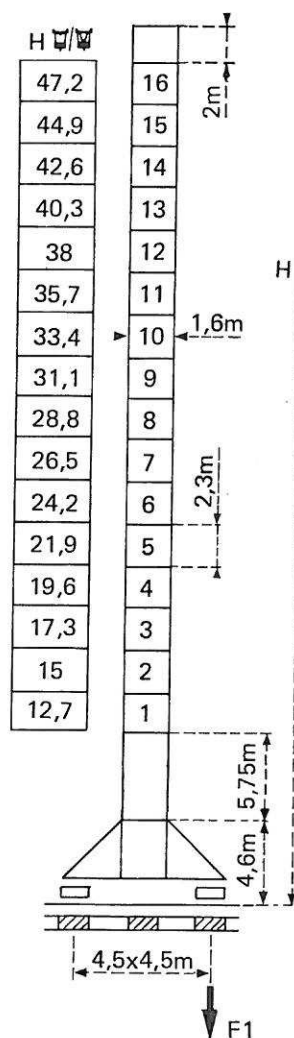
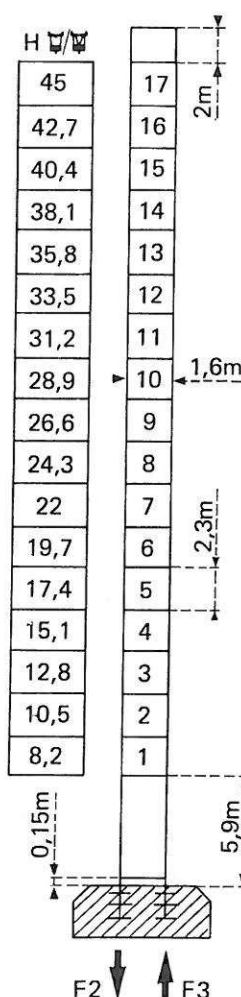
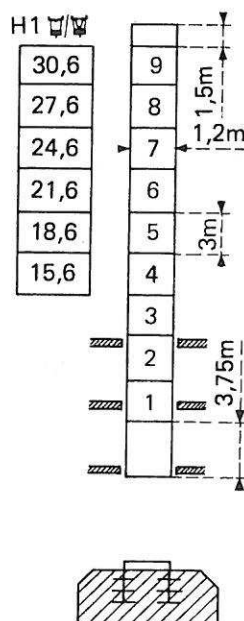
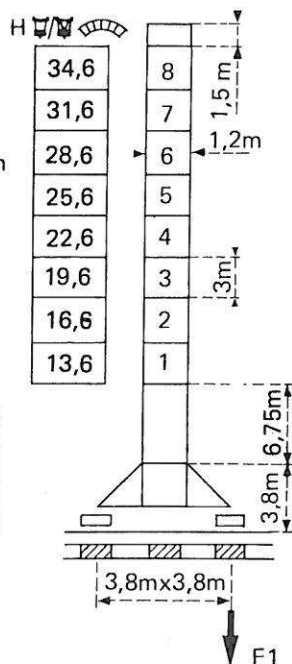
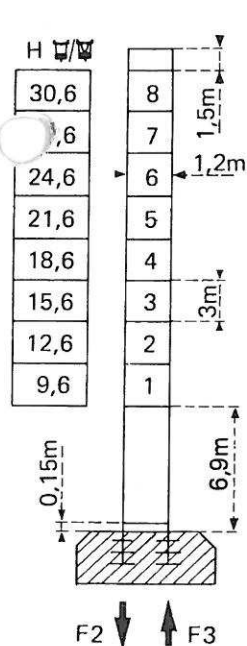
PA 252

LA 252

BA 254

PA 427

SA 426

$$H \text{ IIIIII} = H \text{ } \overbrace{\text{IIIIII}}^{\text{IIIIII}} - 0,3\text{m}$$
$$H_{\text{ш}} = H_{\text{ш}} + 0,7 \text{ м}$$
F = Réactions *Eckdrücke* Reactions *Reacciones*

F2	● 60t	■ 59t
F3	● 44t	■ 45t
	21t	


F1	● 35t	■ 42t
	25t	

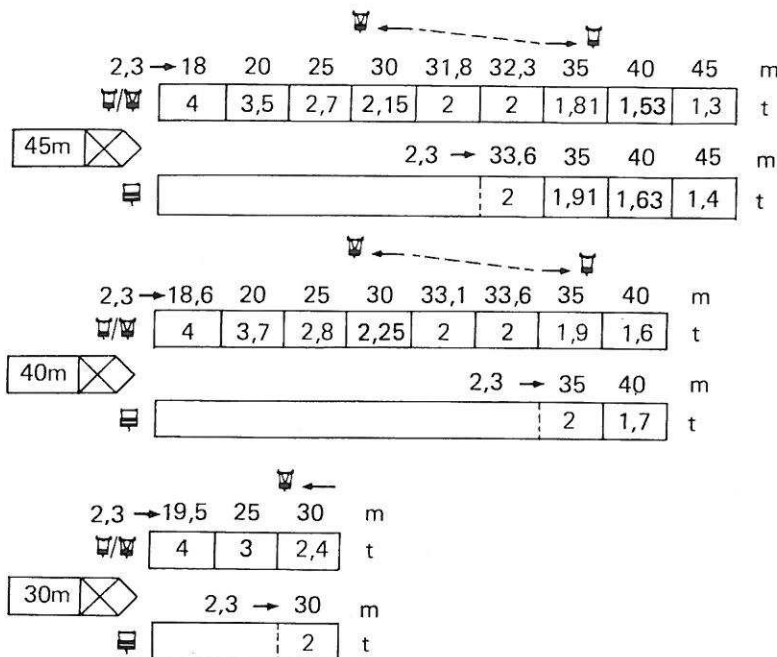
Voir ci-contre
Siehe nebenstehend
 See opposite
Ver página opuesta

F2	● 63t	■ 106t
F3	● 44t	■ 88t
	29,5t	

F1	● 49t	■ 73t
	36t	

Courbes de charges Lastkurven Load diagrams Curvas de cargas

 Flèche Ausleger Jib Flecha



 Chariot standard 2/4 brins.
(En cas d'utilisation  déduire 0,1 t aux charges ).

 Chariot optionnel 2 brins uniquement.

 Standardlaufkatze 2/4 Stränge. (Bei Einsatz von  ist 0,1 t der Lasten von  abzuziehen.
 Laufkatze in Sonderausführung mit nur 2 Strängen.

 Standard trolley 2/4 fall. (When using  subtract 0,1 t from the loads ).

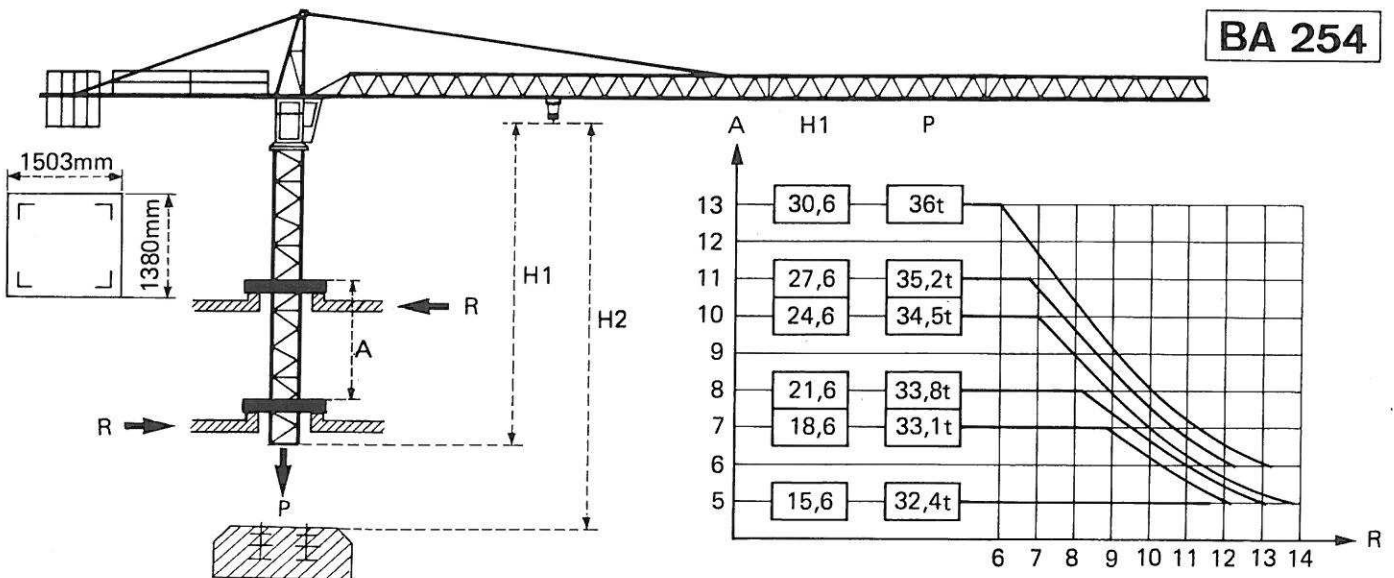
 Optional trolley 2 fall only.

 Carro standard 2/4 ramales. (En caso de utilización  quitar 0,1 t de las cargas ).

 Carro opcional en 2 ramales solamente.

Télescopage sur dalles - Ketterkrane im Gebäude Climbing crane - Telecopage gruas trepadoras

BA 254



A Distance entre cadres A Abstand zwischen den Rahmen
H1 Hauteur grue H1 Kranhöhe
P Poids de la grue P Krangewicht
R Réaction horizontale R Horizontalkräfte

A Distance between collars A Distancia entre marcos
H1 Crane height H1 Altura grúa
P Crane weight P Peso de la grúa
R Horizontal reaction R Reacción horizontal

H2			
25 PC 10		33 PC 10	
			
182	91	180	90

● En service
■ Hors service

● In Betrieb
■ Ausser Betrieb

 A vide sans lest avec flèche et hauteur maximum.  Ohne Last und Ballast mit Maximalausleger und Maximalhöhe.

● In service
■ Out of service

 Without load and ballast with longest jib and maximum height.

● En servicio
■ Fuera de servicio

 Sin cargas, sin lastre con flecha y altura máxima.

POTAIN  TOPKIT E10/14C

Courtesy of CraneMarket.com

Mécanismes Antriebe Mechanisms Mecanismos

					m/min	t		ch-PS hp	kW
Levage Heben Hoisting Elevación	Treuil standard Standardhubwerk Standard hoist winch Mecanismo standard				8	2	364 m > 364 m *	25	18,4
					45	2			
					90	1			
					4	4			
					22,5	4			
					45	2			
	Treuil optionnel Wahlweises Hubwerk Optional winch Mecanismo opcional				11	2	360 m > 360 m *	33	24
					60	2			
					120	1			
					5,5	4			
					30	4			
					60	2			
Distribution - Katzfahren Trolleying - Distribución			2 D 2V2	14 → 42			2,7	2	
Orientation - Schwenken Slewing - Orientación			OMD 30	0,1-0,4-0,8 tr/min U/min-rpm			8	5,9	
Translation Kranfahren Travelling Traslación	LA 252 	TVD 325 C 2		26			2 x 5	2 x 3,7	
	 R ≥ 6m	RT 224 C2S		25			2 x 4	2 x 2,9	
		RT 224 C 1S							
	SA 426 	RT 223 C2 2V		12 - 24			2 x 5	2 x 3,7	
		RT 223 C1 2V							
	R ≥ 9m	RC 446 ARC H ≤ 33,4m		10-50			4 x 6,8	4 x 5	
Réseau - Netzstrom - Mains supply - Red								380V - 50 HZ	
Puissance électrique nécessaire - Anschlusswert - Necessary electric power - Potencia electrica necesaria								25 PC 10 : 35 KVA 33 PC 10 : 45 KVA	
Groupe électrogène - Stromaggregat - Generator set - Grupo electrogeno								*	

*Nous consulter - Auf Anfrage - Consult us - Consultarnos

NF E 52081 - 82

POTAIN

18, rue de Charbonnières B.P 173 — F 69132 ECULLY Cedex
Tél. (7) 833.81.81 - Télex 330 179 F

POTAIN GmbH - D 6082 MÖRFELDEN WALLDORF
Nordendstr. 79-87 - Postfach 420 - Tel. 06105 704.0 — Telex 4.185745
POTAIN SUISSE S.A - CH 5115 MÖRIKEN WILDEGG
Tel. 64.53.19.91 - Telex 68294

TOPKIT E10/14C

Ref. 8439 KMA 1